

**DESCRIPTION** Fritz FL-17L is a non-aqueous suspension of FL-17, a universal cement fluid loss and gas migration control additive recommended for cementing systems to control the loss of filtrate from a cement slurry.

- ADVANTAGES**
- FL-17L can be used in casing and liner cementing using fresh to saturated salt-water cement slurries.
  - It is ideally suited for squeeze cementing in coil tubing due to its non-gellation properties.
  - In primary cementing, it functions as a gas migration control additive because of its non-gellation characteristics.
  - It provides exceptional filtrate control when used with retarders at bottom hole circulating temperatures up to 400°F (204 C).

- APPLICATION**
- Temperature range is 80°F – 400°F. (27 C to 204 C)
  - FL-17L may be used for fluid loss control in any API class of cement (A, C, G, or H).
  - It may be used in fresh to saturated salt water slurries and is compatible with other additives such as dispersants, silica flour, retarders, defoamers and weighting materials.

- PROPERTIES**
- Dark Brown Liquid
  - Activity – 41.7%
  - Specific Gravity – 1.007
  - Bulk Density – 8.39 lb./gal.
  - Absolute Volume – 0.1192 gal./lb.
  - Water requirement – none
  - Disperses in water
  - Packaged in 5 gallon pails and 55 gallon drums
  - Loading Rate – 0.054 to 0.81 gal./sk (0.20 to 3.05 L/sk)
  - See Fluid Loss & Gas Migration Control Data for FL-17

The information contained herein is based on data considered accurate with representative samples. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof. The above data does not imply specifications for this product. Fritz Industries, Inc. assumes no responsibility for personal injury or property damage to vendees, users or third parties, caused by the material. Such vendees or users assume all risks associated with the use of the material. Consult the Material Safety Data Sheet before using this product.

**FL-17 FLUID LOSS TESTING**

TEMP., °F	FL-17, % BWC	WATER, % BWC	SALT, % BWW	#1 SILICA SAND	RETARDER, % BWC	ATM. VIS., Bc		RHEOLOGY (rpm)						FLUID LOSS, CC
						i	f	600	300	200	100	6	3	
100	0.8%	38.0%	0%	0%	0.0%	13	15	330+	318	238	140	15	10	28
100	0.8%	38.0%	18%	0%	0.0%	12	15	330+	274	211	134	31	28	148
100	0.8%	38.0%	36%	0%	0.0%	14	16	330+	292	225	141	31	25	202
180	0.3%	38.0%	36%	0%	0.0%			Gelled						
180	0.5%	38.0%	36%	0%	0.0%	11	8	226	133	96	57	11	10	539
180	0.8%	38.0%	36%	0%	0.0%	10	10	282	169	123	71	8	6	120
180	0.8%	38.0%	0%	0%	0.1%	17	20	330+	330+	305	214	91	88	52
180	0.8%	38.0%	18%	0%	0.1%	11	6	203	107	73	39	4	3	41
180	0.8%	38.0%	36%	0%	0.1%	13	7	235	142	103	60	6	5	38
180	0.3%	38.0%	0%	35%	0.5%	11	9	212	112	78	40	5	4	64
180	0.5%	38.0%	0%	35%	0.5%	11	10	276	160	113	60	5	4	38
180	0.8%	38.0%	0%	35%	0.5%	20	14	330+	315	220	121	10	5	22
180	0.3%	38.0%	18%	35%	0.5%	10	9	206	105	71	37	4	3	92
180	0.5%	38.0%	18%	35%	0.5%	14	10	255	131	90	47	4	3	38
180	0.8%	38.0%	18%	35%	0.5%	20	12	330+	217	154	83	7	4	29
180	0.3%	38.0%	36%	35%	0.5%	10	9	235	115	76	41	4	3	80
180	0.5%	38.0%	36%	35%	0.5%	12	9	260	127	90	48	5	4	42
180	0.8%	38.0%	36%	35%	0.5%	20	11	330+	196	139	76	6	4	23
245	0.5%	38.0%	0%	35%	0.5%	11	10	276	160	113	60	5	4	42
245	0.8%	38.0%	0%	35%	0.5%	11	10	276	160	113	60	5	4	19
245	0.5%	38.0%	18%	35%	0.5%	14	10	255	131	90	47	4	3	43
245	0.8%	38.0%	18%	35%	0.5%	20	12	330+	217	154	83	7	4	25
245	1.5%	38.0%	18%	35%	0.5%	21	10	330+	205	146	83	7	5	18
245	0.5%	38.0%	36%	35%	0.5%	12	9	260	127	90	48	5	4	46
245	0.8%	38.0%	36%	35%	0.5%	20	11	330+	196	139	76	6	4	28
308	1.5%	47.9%	0%	35%	1.5%	19	10	330+	173	121	65	6	3	88
308	1.5%	41.7%	18%	35%	1.5%	25	12	330+	208	146	85	7	4	30
308	1.0%	41.7%	36%	35%	1.0%	15	11	330+	330+	226	137	8	5	26
308	1.5%	41.7%	36%	35%	1.0%	15	12	330+	330+	231	140	12	7	22

\* ALL TESTING WAS PERFORMED WITH CLASS H CEMENT UNLESS OTHERWISE NOTED.

The information contained herein is based on data considered accurate with representative samples. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof. The above data does not imply specifications for this product. Fritz Industries, Inc. assumes no responsibility for personal injury or property damage to vendees, users or third parties, caused by the material. Such vendees or users assume all risks associated with the use of the material. Consult the Material Safety Data Sheet before using this product.

Corporate Headquarters P.O. Drawer 170040, Dallas, TX 75217  
1-800-955-1323 • 1-972-285-5471 • Fax 1-972-270-0179  
Visit our website at [www.fritzoil.com](http://www.fritzoil.com) or e-mail us at [oilsales@fritzind.com](mailto:oilsales@fritzind.com)

**FL-17 FLUID LOSS TESTING**

ADDITIVE	% BWC	WATER, GAL./SK	TEMP., °F	ATM. VIS., Bc		RHEOLOGY (rpm)						FLUID LOSS, CC	THICKENING TIME, H:MM	COMMENTS
				i	f	600	300	200	100	6	3			
FL-17	0.3	4.3	80	6	7	161	92	64	35	4	3	224		
FL-17	0.5	4.3	80	8	9	242	143	101	56	6	3	57		
FL-17	0.7	4.3	80	8	11	300+	182	129	71	6	4	34		
FL-17	1.0	4.3	80	11	14	300+	294	211	115	9	6	19		
NEAT	0.0	4.3	125										2:04	API 8,000 FT. CASING SCH. 5G
FL-17	0.5	4.3	125	7	7	169	101	73	41	5	3	100		
FL-17	0.6	4.3	125										3:51	API 8,000 FT. CASING SCH. 5G
FL-17	0.8	4.3	125	9	8	277	165	119	67	6	4	38		
FL-17	1.0	4.3	125	8	11	300+	213	153	85	7	5	28		
FL-17	1.0	4.3	180	9	7	176	90	61	32	3	2	34		10% SALT WATER; 0.2% FR-1 BWC
FL-17	1.0	4.3	180	10	7	161	84	58	30	3	2	34		18% SALT WATER; 0.2% FR-1 BWC
FL-17	1.0	4.3	180	12	8	162	107	77	42	4	2	32		SATURATED SALT WATER, 0.2% FR-1 BWC

\* ALL TESTING WAS PERFORMED WITH CLASS H CEMENT UNLESS OTHERWISE NOTED.

The information contained herein is based on data considered accurate with representative samples. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof. The above data does not imply specifications for this product. Fritz Industries, Inc. assumes no responsibility for personal injury or property damage to vendees, users or third parties, caused by the material. Such vendees or users assume all risks associated with the use of the material. Consult the Material Safety Data Sheet before using this product.

Corporate Headquarters P.O. Drawer 170040, Dallas, TX 75217  
1-800-955-1323 • 1-972-285-5471 • Fax 1-972-270-0179  
Visit our website at [www.fritzoil.com](http://www.fritzoil.com) or e-mail us at [oilsales@fritzind.com](mailto:oilsales@fritzind.com)

**FL-17 ZERO STATIC GEL STRENGTH & GAS MIGRATION CONTROL TESTING**

SLURRY COMPOSITION	TEMP., °F	THICKENING TIME, H:MM	ZERO STATIC GEL STRENGTH, MINUTES	TRANSITION TIME, MINUTES	UCA 50 PSI, H:MM	UCA 500 PSI, H:MM	UCA 24 HR., PSI
H CEMENT+ RETARDER	140		27	195	8:00	9:05	3206
H CEMENT+ RETARDER+ 0.6% FL-17	140	3:45	372	22	4:28	5:50	2669
H CEMENT+ RETARDER	200		47	14	4:14	4:56	3212
H CEMENT+ RETARDER+ 0.6% FL-17	200	3:30	144	32	3:25	3:59	3456
H CEMENT+ RETARDER	250		67	62	3:16	4:04	2154
H CEMENT+ RETARDER+ 1.4% FL-17	250	3:39	152	27	3:47	4:35	1878

The information contained herein is based on data considered accurate with representative samples. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof. The above data does not imply specifications for this product. Fritz Industries, Inc. assumes no responsibility for personal injury or property damage to vendees, users or third parties, caused by the material. Such vendees or users assume all risks associated with the use of the material. Consult the Material Safety Data Sheet before using this product.

Corporate Headquarters P.O. Drawer 170040, Dallas, TX 75217  
1-800-955-1323 • 1-972-285-5471 • Fax 1-972-270-0179  
Visit our website at [www.fritzoil.com](http://www.fritzoil.com) or e-mail us at [oilsales@fritzind.com](mailto:oilsales@fritzind.com)

**FL-17 LOW TEMPERATURE TESTING**

**SLURRY DESIGN**

CEMENT	JOPPA CLASS H
FL-17	0.6% bwc
CaCl <sub>2</sub>	1% bwc
WATER	40% bwc
TEMPERATURE	80°F

**FLUID LOSS** 38 cc

**ATMOSPHERIC CONSISTOMETER**



INITIAL	7
FINAL	8

**UCA DATA**

50 PSI @	03:54
2500 PSI @	24:00
3641 PSI @	48:00

**RHEOLOGY DATA**

<u>RPM</u>	<u>READING</u>
600	247
300	144
200	103
100	57
6	5
3	4

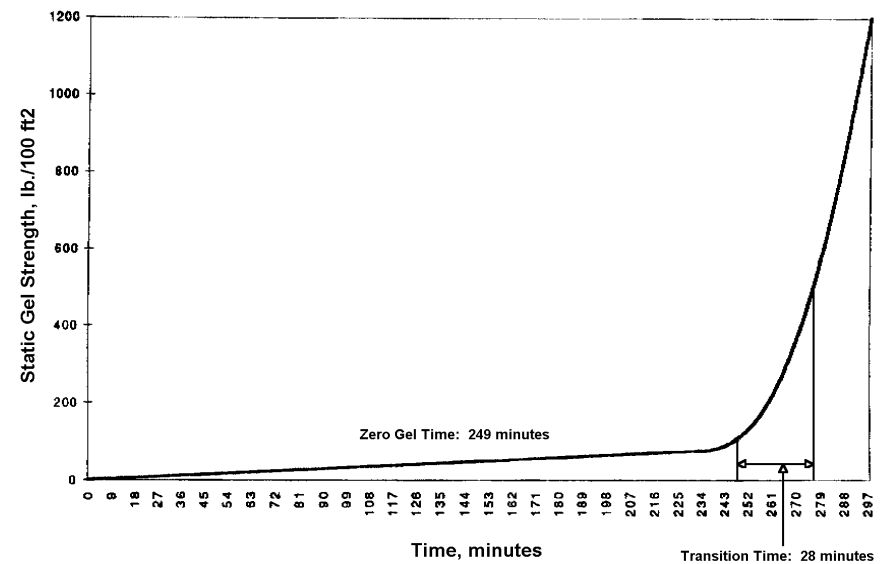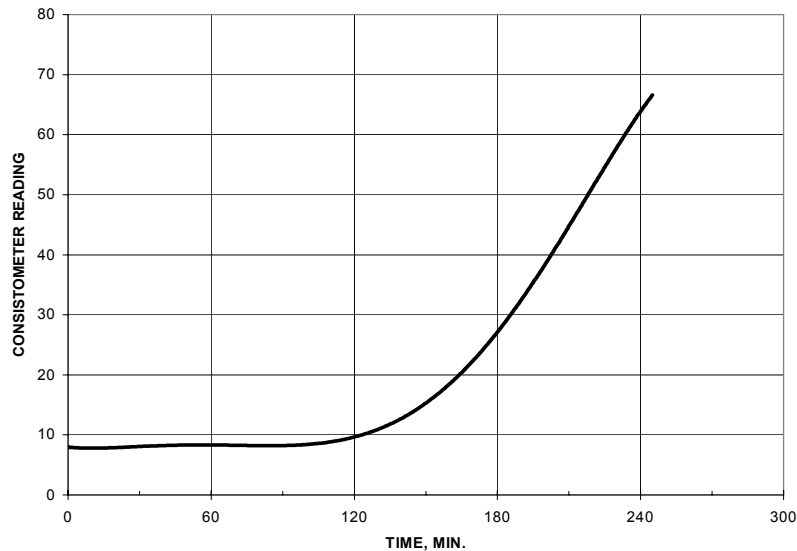

The information contained herein is based on data considered accurate with representative samples. However, no warranty is expressed or implied regarding the accuracy of this data or the results to be obtained from the use thereof. The above data does not imply specifications for this product. Fritz Industries, Inc. assumes no responsibility for personal injury or property damage to vendees, users or third parties, caused by the material. Such vendees or users assume all risks associated with the use of the material. Consult the Material Safety Data Sheet before using this product.